

Ocean Hatch

With its classic style, the Ocean Hatch is fitted to thousands of boats around the world. Its rugged construction provides the ultimate protection against the elements, whatever conditions you might face.

- Friction levers hold the lid open in any position up to 95°
- Anodised aluminium frame for corrosion resistance
- Full range of spare parts available on-line www.lewmar.com




Size 10




Size 20




Size 30




Size 40

Size 44¹

Size 50




Size 60




Size 70

¹ Minimum size for ISO 9094 escape hatches

Ocean Hatch Dimensions

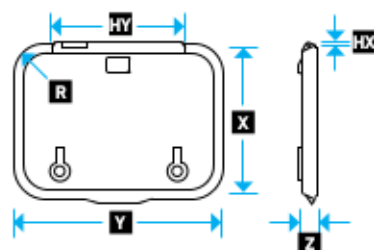

Ocean Hatch Cut-out



Flange profile
Flange size 25mm/1in



Flat Base profile

PART NUMBER	Size	LOWER FRAME	OVERALL DIMENSIONS										CUT-OUT DIMENSIONS Change if Trimkits are used										HATCH WEIGHT		ACRYLIC WINDOW THICKNESS	
			X		Y		Z		R		HX		HY		X1		Y1		R1							
			mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
39610050	10	Flat Base	324	12 3/4	324	12 3/4	39.5	1 9/16	75	2 15/16	5	3/16	138	5 7/16	255	10 1/16	255	10 1/16	40	1 9/16	226	577	10	3/8		
39610070		Flange													260	10 1/4	260	10 1/4	42.5	1 11/16						
39620050	20	Flat Base	266	10 1/2	411	16 3/16	39.5	1 9/16	69	2 11/16	5	3/16	225	8 7/8	197	7 3/4	342	13 7/16	34	1 5/16	274	604	10	3/8		
39620070		Flange													202	7 15/16	347	13 11/16	36.5	1 7/16						
39630050	30	Flat Base	391	15 3/8	521	20 1/2	39.5	1 9/16	75	2 15/16	5	3/16	335	13 3/16	322	12 11/16	452	17 13/16	40	1 9/16	4.5	9.9	10	3/8		
39630070		Flange													327	12 7/8	457	18	42.5	1 11/16						
39640050	40	Flat Base	485	19 1/8	485	19 1/8	39.5	1 9/16	75	2 15/16	5	3/16	299	11 3/4	416	16 3/8	416	16 3/8	40	1 9/16	476	10.5	10	3/8		
39640070		Flange													421	16 9/16	421	16 9/16	42.5	1 11/16						
39644050	44	Flat Base	509	20 1/16	509	20 1/16	43	1 11/16	76	3	4	3/16	302	11 7/8	437	17 3/8	437	17 3/8	40	1 9/16	5	11	12	1/2		
39644070		Flange													442	17 3/8	442	17 3/8	42.5	1 11/16						
39650050	50	Flat Base	444	17 1/2	574	22 5/8	43	1 11/16	76	3	4	3/16	367	14 7/16	372	14 9/16	502	19 3/4	40	1 9/16	7.3	16.1	12	1/2		
39650070		Flange													377	14 9/16	507	19 15/16	42.5	1 11/16						
39660050	60	Flat Base	574	22 5/8	574	22 5/8	43	1 11/16	76	3	4	3/16	367	14 7/16	502	19 3/4	502	19 3/4	40	1 9/16	8	17.6	12	1/2		
39660070		Flange													507	19 5/16	507	19 15/16	42.5	1 11/16						
39670050	70	Flat Base	694	27 5/16	694	27 5/16	43	1 11/16	76	3	4	3/16	487	19 3/16	622	24 1/2	622	24 1/2	40	1 9/16	10.8	23.8	12	1/2		
39670070		Flange													627	24 11/16	627	24 11/16	42.5	1 11/16						